




4G connectivity might work fine today, but the switch to 5G is inevitable. Futureproof your network with the latest 5G technology, and keep your network running for many years to come.








## A single SKU for global deployments

Extensive list of compatible 5G/LTE bands. Native 5G NSA and SA mode support.

### **Private 5G Support**

Adding devices to your Private 5G network is no longer a hassle. Integration can be as simple as plug and play.



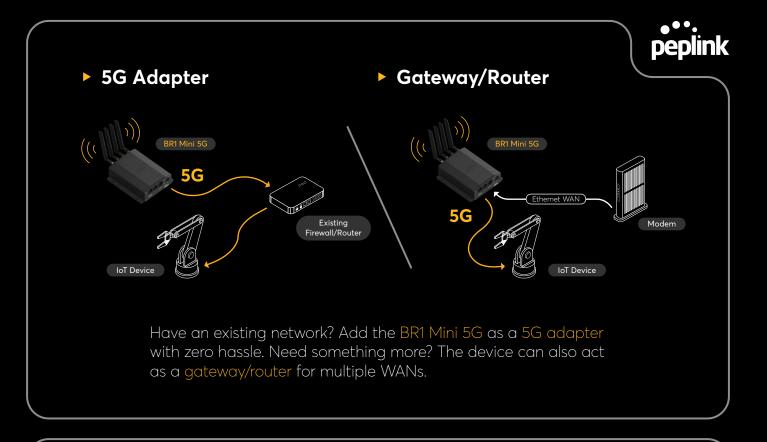

## Stay in touch with InTouch

Access connected devices, like sensors and cameras, with out of band management at 5G speeds.





# Monitor your entire network from a single screen

Remotely access your Peplink devices' web admin with InControl2, our cloud-based endpoint management system.

Generate reports and push configurations for more effective management.

## Key BR1 Mini 5G Benefits

An exceptionally reliable, rugged 5G Cellular Router that connects your data and Internet applications - wherever they are.

### #1 Future-proof Connectivity

With the latest cellular LTE and 5G via **SIM** or **eSIM** and a second optional **Ethernet WAN**, the BR1 Mini 5G connects your Ethernet devices with up to 300Mbps throughput.

## **#2** Ruggedized and Reliable

Built in a **rugged & reliable metal case** with **fanless, ventless design** certified for shock and vibration resistance for deployment virtually anywhere.

## **#3** Designed for Remote Operation

With central management via Peplink **InControl2** and local device management via Peplink **InTouch**, the BR1 Mini saves time and reduces field visits.

## Use Cases

POS







Mobility









## **BR1 Mini 5G**





1x GE WAN/LAN port <sup>1</sup>

## **Specifications**

WAN Interface	1x 10/100/1000M Ethernet <sup>1</sup> 1x Embedded Cellular Modem with	Antenna Connectors	4x SMA Cellular Antenna Connectors
	Redundant SIM Slots	Power Input	Power Port: 10V – 30V DC
LAN Interface	2x 10/100/1000M Ethernet		AC Adapter: AC Input 100V–240V / DC Output 12V Power over Ethernet 802.3at
SpeedFusion features	Hot Failover <sup>1</sup> / Smoothing <sup>1</sup> / Bandwidth Bonding <sup>2</sup>	Power Consumption	11W (nominal) , 13W (max.)
		Dimension	5.0 x 4.2 x 1.4 inches / 125.7 x 107 x 35 mm
Number of SpeedFusion VPN Peers	2 / 5 <sup>2</sup>	Weight	0.93 pounds / 420 grams
		Operating Temperature	-40° – 149°F / -40° – 65°C
Router Throughput	300 Mbps	Humidity	15% – 95% (non-condensing)
SpeedFusion VPN Throughput		Certification	FCC, CE, RoHS
- No Encryption - 256-bit AES	80 Mbps 20 Mbps / 60Mbps		EN 61000 Electromagnetic Compatibility EN 45545-2 Railway applications - Fire protection 4
Recommended Users	1-60	Package Content	1x BR1 Mini 5G
Cellular Data Rate ³ (Downlink/Uplink)	5G: 3.4 Gbps / 900 Mbps CAT-20: 1.6 Gbps / 200 Mbps		4x LTE/5G Antennas (ACW-235) 1x 12V 2A 4pin Power Supply (ACW-632)
(		SIM Options	Nano-SIM (4FF) Peplink eSIM BYO eSIM (2 profiles)

Warranty

1-Year Limited Warranty

<sup>1</sup> Available with a feature pack add-on license or a PrimeCare subscription.
<sup>2</sup> Requires a PrimeCare subscription, complimentary for the first year.
<sup>3</sup> Maximum theoretical data rate.
<sup>4</sup> Certification Pending.

Specifications are subject to change without notice.

## BR1 Mini 5G



### **Ordering Information**

#### **Product Code**

#### Regions^

MAX-BR1-MINI-5GN-T-M-PRM Embedded Modem(s): 1x 5G Global\* \*US Carrier Certifications: AT&T, T-Mobile, Verizon (C-Band), FirstNet **5G Bands 5G (NSA & SA) Sub 6Ghz:** n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n70,

n71, n75, n76, n77, n78, n79

#### LTE Bands

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71

^ Regions are for reference only. For specific location compatibility, please refer to the bands.

#### **Featured Add-on**

Product Code	Description
PRM-A-1Y / PCP-A-1Y	PrimeCare A / PrimeCare+ A (1-Year)
PRM-A-2Y / PCP-A-2Y	PrimeCare A / PrimeCare+ A (2-Year)
PRM-A-4Y / PCP-A-4Y	PrimeCare A / PrimeCare+ A (4-Year)
MAX-BR1-MINI-LC-FP	Feature pack for BR1 Mini enables Ethernet WAN, Hot Failover, Smoothing
MAX-BR1-MINI-BD-FP-PLUS-2Y	MAX BR1 Mini Bundle Offer - 2 year PrimeCare+ extension & complimentary feature pack
MAX-BR1-MINI-BD-FP-PLUS-4Y	MAX BR1 Mini Bundle Offer - 4 year PrimeCare+ extension & complimentary feature pack
ACW-634	10ft DC Power Cable
ACW-DIN-BR1-MINI	DIN Rail mount kit
ANT-SLM-40G-S-B-6	Slim 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (Black)
ANT-MB-40G-S-W-6	Mobility 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (White)
ANT-MB-40G-S-B-6	Mobility 40G - 4x4 MIMO 5G Ready Cellular Antenna System with GPS (Black)